

# PRODUCT DATASHEET

## FL PFM 20 W 4000 K SYM 100 S BK

FLOODLIGHT SENSOR 20 W | Floodlight with flexible motion and daylight sensor, up to 2400 lm light output



### Areas of application

- Replacement for floodlights with halogen lamps
- Outdoor use (IP65)
- Public areas
- Building facades
- Construction areas
- Gardens, balconies and other outdoor areas

### Product benefits

- Bright, robust and durable
- Demand optimized illumination due to flexible and programmable sensor
- Easy adjustment of sensor range, daylight detection and hold time
- Always-on override, activated via special mains switching pattern
- Safe and very uniform illumination, due to frosted and tempered glass diffuser
- Energy savings of up to 90 % compared to halogen lamp floodlights
- 5 years guarantee

### Product features

- Flexible motion and daylight sensor
- Sensor with 350° pan and 180° tilt
- Reflector-based, symmetric light distribution with 100° x 100° beam angle
- Integrated wide voltage driver, suitable for 100 - 277 V AC
- Surge protection: up to 4 kV (L/N-PE), 2 kV (L-N)
- Mounting bracket with 30° angle and wide rotation area



- Pre-installed, flexible 1 m cable (H05RN-F), wrapped 3 x 1.0 mm<sup>2</sup> single wires


## TECHNICAL DATA

### Electrical data


|   |                       |
|---|-----------------------|
| Nominal wattage   | 20.00 W               |
| Nominal voltage   | 100...277 V           |
| Mains frequency   | 50...60 Hz            |
| Nominal current   | 102 mA                |
| Inrush current  | 7.34 A                |
| Inrush current time $T_{h50}$                               | 35.5 $\mu$ s          |
| Max. number of luminaires per miniature circuit breaker B16 | 86                    |
| Max. number of luminaires per miniature circuit breaker C10 | 62                    |
| Max. number of luminaires per miniature circuit breaker C16 | 99                    |
| Power factor $\lambda$                                      | > 0.90                |
| Total harmonic distortion                                   | < 20 %                |
| Protection class  | I                     |
| Operating mode  | Integrated LED driver |

### Photometrical data

|  |                           |
|--|---------------------------|
| Luminous flux                                | 2400 lm                   |
| Luminous efficacy                            | 120 lm/W                  |
| Color temperature                            | 4000 K                    |
| Light color (designation)                    | Cool White                |
| Color rendering index Ra                     | $\geq$ 80                 |
| Standard deviation of color matching         | $\leq$ 5 sdc <sub>m</sub> |
| Luminous intensity                           | -                         |
| Flickering metric (Pst LM)                   | -                         |
| Stroboscope effect metric (SVM)              | -                         |
| Photobiological safety group acc. to EN62778 | RG1                       |
| Photobiological safety group acc. to EN62471 | RG1                       |
| Beam angle                                   | 100 ° x 100 °             |

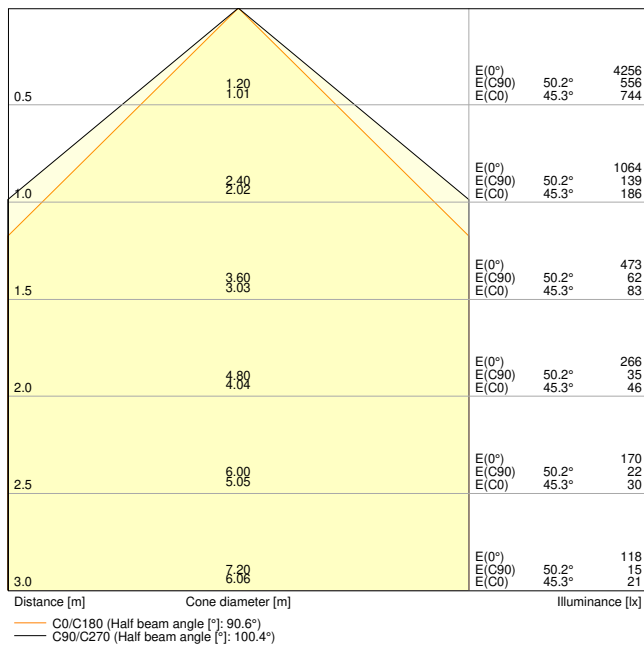


FL PFM 20W 4000K SYM 100 S BK

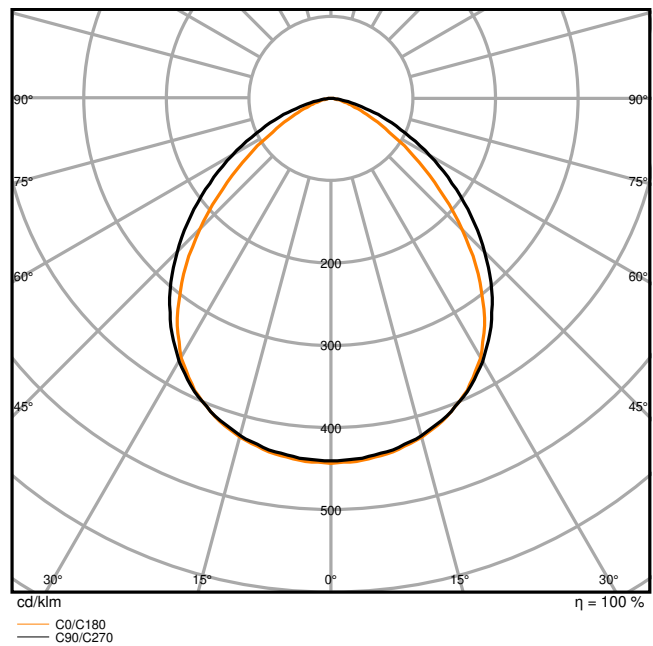

FL PFM 20W 4000K SYM 100 S BK

Dimensions & Weight

|                |           |
|----------------|-----------|
| Length         | 176.00 mm |
| Width          | 156.00 mm |
| Height         | 55.00 mm  |
| Product weight | 570.00 g  |
| Cable length   | 1000 mm   |



Materials & Colors

|               |       |
|---------------|-------|
| Product color | Black |
|---------------|-------|

|  |          |
|--|----------|
| Housing color                              | Black    |
| Body material                              | Aluminum |
| Light emitting surface material            | Glass    |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C   |
| Mercury content                            | 0.0 mg   |

### Application & Mounting

|  |                |
|--|----------------|
| Ambient temperature range              | -30...+50 °C   |
| Temperature range at storage           | -40...+70 °C   |
| Type of connection                     | Cable, 3-pole  |
| Type of protection                     | IP65           |
| Protection class IK (shock resistance) | IK07           |
| Dimmable                               | No             |
| Mounting type                          | Surface        |
| Mounting location                      | Wall / Ceiling |
| Application environment                | Outdoor        |
| Adjustable                             | Yes            |
| With light source                      | Yes            |

### Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 70000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 55000 h <sup>1)</sup> |
| Lifespan L80/B50 at 25 °C  | 55000 h               |
| Lifespan L90/B10 at 25 °C  | 35000 h               |
| Number of switching cycles | 100000                |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

|                             |        |
|-----------------------------|--------|
| Output current              | 230 mA |
| ECG - Output ripple current | < 50 % |

### Sensor

|                                  |                            |
|----------------------------------|----------------------------|
| Type of sensor                   | Motion / Light             |
| Sensor technology                | Passive infrared/Photocell |
| Sensor detection angle           | 40 °...160 °               |
| Sensor controlled switching time | 10 s...12 min              |

|  |              |
|--|--------------|
| Detection range of motion sensor       | 2...12 m     |
| Detection threshold of daylight sensor | 10...2000 lx |
| Sensor IP rating                       | IP65         |






### Certificates & Standards



|  |                                   |
|--|-----------------------------------|
| Standards  | CE / CB / ENEC / EAC / RoHS / EPD |
| Luminaire with limited surface temperature, "D sign" | No                                |
| Ball shot safe                                       | No                                |
| EPD  | LEDV-00009-V01.01-EN              |
| Replaceable light source (EPREL)                     | Not replaceable                   |











### Safety advice

- All electrical connections must be made by a qualified person.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
- Terminal block not included. Installation must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

### DOWNLOAD DATA

| Documents and certificates   |  | Document name                      |
|--|--|------------------------------------|
|  | User instruction / safety instructions | FLOODLIGHT SENSOR                  |
|  | Legal information                      | LSI FL PFM SYM                     |
|  | Legal information                      | FL PFM SYM                         |
|  | Legal information                      | Informationstext 18 Abs 4 ElektroG |
|  | Declarations of conformity             | FL PFM SENSOR                      |

| Photometric and lighting design files  |                | Document name                 |
|--|----------------|-------------------------------|
|  | IES file (IES) | FL PFM 20W4000K SYM 100 S BK  |
|  | IES file (IES) | FL PFM 20W 4000K SYM 100 S BK |







| Photometric and lighting design files  |                                     | Document name                                 |
|--|-------------------------------------|---|
|    | LDT file (Eulumdat)                 | FL PFM 20W4000K SYM 100 S BK                  |
|    | LDT file (Eulumdat)                 | FL PFM 20W 4000K SYM 100 S BK                 |
|    | ULD file (DIALux)                   | FL PFM 20W-4000K SYM 100 S BK                 |
|    | ROLF file (RELUX)                   | FL PFM 20W-4000K                              |
|    | UGR file (UGR table)                | FL PFM 20W 4000K SYM 100 S BK                 |
|    | Light distribution curve type cone  | FL PFM 20W 4000K SYM 100 S BK                 |
|    | Light distribution curve type polar | FL PFM 20W 4000K SYM 100 S BK                 |
| CAD/BIM files  |                                     | Document name                                 |
|    | BIM Revit 3D                        | Floodlight Sensor G3                          |
|   | CAD STEP 3D                         | FL G3 SEN 20W                                 |
| Tender texts   |                                     | Document name                                 |
|  | Tender documents                    | FLOODLIGHT SENSOR 20 W 4000 K SYM 100 S BK-EN |


### LOGISTICAL DATA



| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075460959 | Folding box<br>1             | 65 mm x 162 mm x 184 mm              | 652.00 g     | 1.94 dm <sup>3</sup>  |
| 4058075460966 | Shipping box<br>12           | 414 mm x 349 mm x 222 mm             | 8518.00 g    | 32.08 dm <sup>3</sup> |




The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### ADDITIONAL CATALOG INFORMATION

|   | SENS  | LUX  | TIME  |
|---|--|---|--|
|  | -2 m   | < 10 lx   | -10 sec ± 3 sec  |
|  | -6 m   | < 100 lx  | -5 min ± 2 min   |
|  | -12 m  | < 2000 lx   | -12 min ± 3 min  |



|     | A   | B  | C   |  |  |
|-----|-----|----|-----|---|---|
| 10W | 59  | 39 | 5,5 | 2x M4   | 0,015m <sup>2</sup>   |
| 20W | 78  | 58 | 6,5 | 2x M4   | 0,015m <sup>2</sup>   |
| 50W | 108 | 78 | 8,5 | 2x M8   | 0,032m <sup>2</sup>   |



## References / Links

- For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.